



LOFPLEAT™ CP radial pleated high flow filter cartridges

Eaton's absolute rated LOFPLEAT CP filter cartridges are suitable for a wide range of process applications, including RO pre-filters, chemicals, wastewater and many more.

LOFPLEAT CP filter cartridges are high efficiency, high performance filter elements. Constructed with a large surface, melt blown polypropylene media they provide a high dirt-holding capacity with low initial differential pressure.

Features and benefits

- High surface area for increased flow and dirt-holding capacity
- 216 ft² (20 m²) of surface area per 40" length
- Long service life provides low cost change-out benefits
- Polypropylene construction for use in a variety of fluids

Design

Filter material
Polypropylene

Inner core, cage, end caps
Polypropylene

O-rings
EPDM (standard),
FPM

Retention ratings
1, 5, 10, 20, 40, 70 μm
@ 99.98% efficiency

Technical data

Nominal length
-40: 40"
-60: 60"

Outside diameter
6.5" (165 mm)

Inside diameter
1.6" (40 mm)

Surface area
216 ft² (20 m²) per 40" element

Max. operating temperature
176 °F (80 °C)

Max. differential pressure
50.7 psid @ 77 °F (3.5 bar @ 25 °C)




Powering Business Worldwide

LOFPLEAT CP cross-pleated high flow filter cartridges

Flow rate*

(70 °F/21 °C per 40" filter cartridge for water)

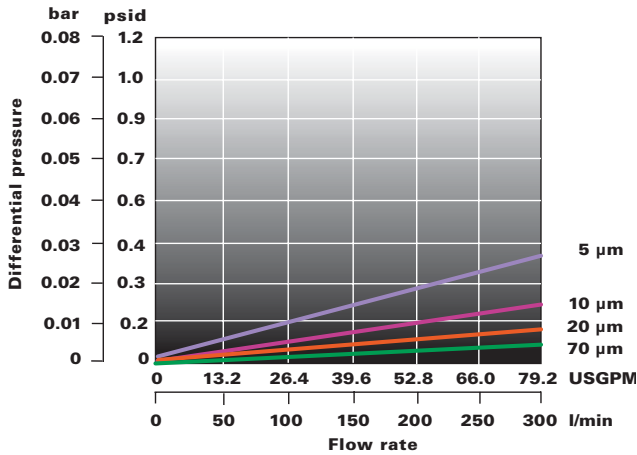

* For liquids other than water, multiply pressure drop by fluid viscosity in centipoise.


Efficiency of retention

Beta ratio efficiency of retention	Beta 5000 99.98%
1 µm	1
5 µm	5
10 µm	10
20 µm	20
40 µm	40
70 µm	70

$$\text{Beta ratio} = \frac{\text{Upstream particle counts}}{\text{Downstream particle counts}}$$

The micron ratings shown at various efficiency and beta ratio value levels were determined through laboratory testing, and can be used as a guide for selecting cartridges and estimating their performance. Under actual field conditions, results may vary somewhat from the values shown due to the variability of filtration parameters. Testing was conducted using the single-pass test method, water at 3 gpm/10" cartridge (9.46 l/min). Contaminants included latex beads, coarse and fine test dust. Removal efficiencies were determined using dual laser source particle counters.

Ordering code

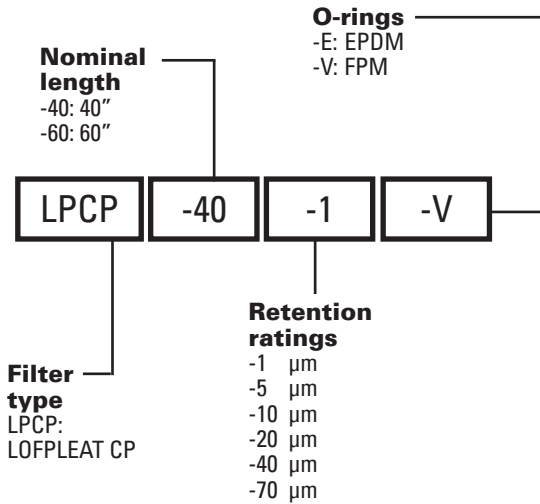

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

China
No. 3, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0

Singapore
100G Pasir Panjang Road #07-08
Singapore 118523
Tel: +65 6825-1668

Friedensstraße 41
68804 Altludersheim, Germany
Tel: +49 6205 2094-0
An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0

Brazil
Rua Clark, 2061 - Macuco
13279-400 - Valinhos, Brazil
Tel: +55 11 3616-8400

For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration

© 2018 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

US
EF-LPCP
05-2018