

Depth Filtration BECODISC® BA Range

Stacked Disc Cartridges for the Filtration of Cognac, Whisky, Brandy, and Other High Quality Spirits


BECODISC BA stacked disc are ideal for the demanding filtration of high quality spirits such as cognac, armagnac, barrel-matured brandy, and whisky. The product range is graded from coarse particle separation to fine filtration and enables accurate adaptation to the requirements of spirit filtration.

The specific advantages of BECODISC BA stacked disc cartridges:

- Low content of calcium, magnesium and iron ions to avoid secondary hazes
- Color-preserving filtration through minimum color adsorption in the depth filter sheet
- Selective separation of long-chain fatty acid esters
- Reliable product retention through ideal pore structure
- High clarification through the use of high-quality raw materials
- Economic service life through high dirt holding capacity
- Comprehensive quality assurance for all raw and auxiliary materials and intense in-process controls ensure consistent quality of the finished products



Water throughput BECODISC BA range

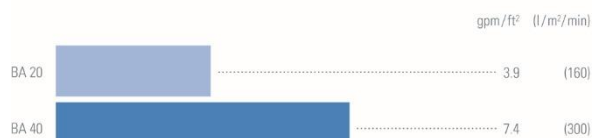

Conditions: $\Delta p = 14.5$ psi (100 kPa, 1 bar), Medium: Water at 68 °F (20 °C)

Fine Filtration of Very Fine Haze Substances

BECODISC BA 20

BECODISC stacked disc cartridges for achieving a high clarifying level. This stacked disc cartridge type reliably retains very fine particles, higher fatty acids and fusel oils. This makes them particularly suitable for haze-free storage and filling.

Clarification Filtration

BECODISC BA 40

BECODISC stacked disc cartridges for clarification filtration and for the separation of medium-strong haze. This stacked disc cartridge type has a high dirt holding capacity and is particularly suitable for the filtration of spirits with a high fusel oil content.

Components

The depth filter sheets of the BECODISC BA stacked disc cartridges are made from extremely pure materials. They contain varying quantities of finely fibrillated cellulose fibers of hardwood and softwood, cationic resin and high quality diatomaceous earth.



Powering Business Worldwide

Physical Data


This information is intended as a guideline for the selection of BECODISC stacked disc cartridges. The water throughput is a laboratory value characterizing the different BECO depth filter sheets. It is not the recommended flow rate.

Type*	Utilized BECO® depth filter sheet	Nominal retention rate µm	Thickness		Ash content %	Bursting strength wet		Water throughput at	
			in	(mm)		psi	(kPa**)	Δ p = 14.5 psi gpm/ft ²	(Δ p = 100 kPa** l/m ² /min)
BA 20	SELECT A 20	0.8	0.17	(4.4)	43	> 5.8	(40)	3.9	(160)
BA 40	SELECT A 40	2.5	0.17	(4.4)	43	> 5.8	(40)	7.4	(300)

* B = Polypropylene version (e.g. BA20)

** 100 kPa = 1 bar

Ordering Information

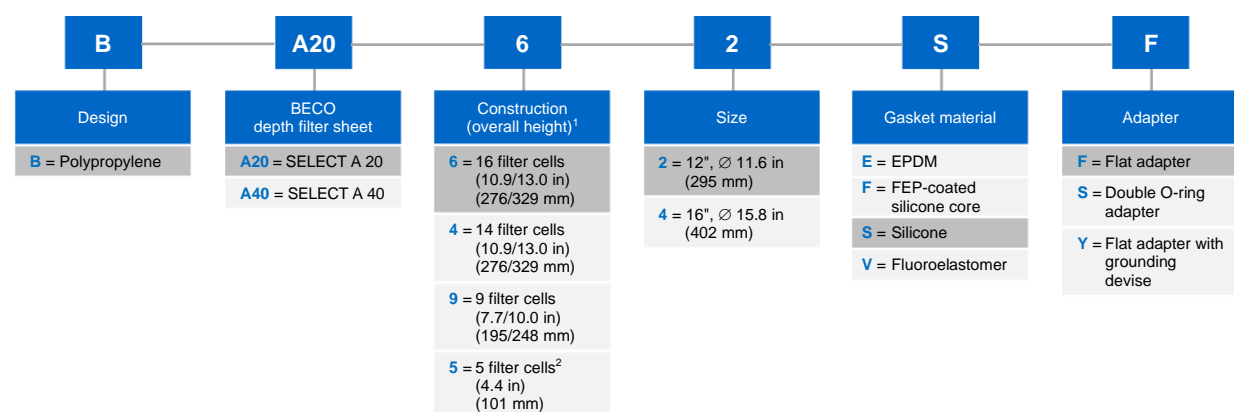

¹ Flat adapter/Double O-ring adapter | ² Cannot be combined with double O-ring adapter

Example: BA2062SF

Polypropylene stacked disc cartridge with BECO SELECT A20 depth filter sheets, nominal retention rate of 0.8 µm, 16 filter cells, 10.9 in (276 mm) high, 12", with silicone gaskets and flat adapter.

	BECODISC 12", Ø 11.6 in (295 mm)					BECODISC 16", Ø 15.8 in (402 mm)				
Number of cells	16	14	9	9	5	16	14	9	9	5
Filter surface area [ft ² (m ²)]	20.5 (1.9)	17.8 (1.65)	11.8 (1.1)	11.8 (1.1)	6.4 (0.59)	39.8 (3.7)	34.4 (3.2)	22.6 (2.1)	22.6 (2.1)	12.4 (1.15)
Overall height flat adapter [in (mm)]	10.9 (276)	10.9 (276)	10.9 (276)	7.7 (195)	4.4 (101)	10.9 (276)	10.9 (276)	10.9 (276)	7.7 (195)	4.4 (101)
Overall height double O-ring adapter [in (mm)]	13.0 (329)	13.0 (329)	13.0 (329)	10.0 (248)	-	13.0 (329)	13.0 (329)	13.0 (329)	10.0 (248)	-

Compliance Notice

BECO depth filter sheets fulfill the requirements of Regulation (EC) 1935/2004 as well as the FDA Guideline 21 CFR § 177.2260 test criteria. The polypropylene components comply with Regulation (EU) 10/2011. The polypropylene meets FDA requirements, 21 CFR § 177.1520. The sealing materials (silicone, EPDM) meet FDA requirements, 21 CFR § 177.2600. For further details on individual components and materials see the declaration of conformity.

Recommendations for Avoiding Damage

BECODISC stacked disc cartridges can be used only in the specified flow direction. This applies to product filtering as well as sanitizing with hot water, and sterilizing with the stacked disc cartridges with saturated steam. In order to avoid damage to the filter cells, the system should be protected with a suitable non-return valve.

Refer to the insert included with each BECODISC stacked disc cartridge carton for detailed application information.

Intermediate Plates

If more than two BECODISC stacked disc cartridges (12" or 16") with double O-ring adapters are stacked in the housing, install a central spindle for safety reasons. In the event, more than one 16" BECODISC stacked disc cartridge (flat adapter/double O-ring adapter) is used in the housing, Eaton recommends the installation of stainless steel intermediate plates between the BECODISC stacked disc cartridges. When silicone/FEP coated gaskets are used the stainless steel plates are mandatory.

Sanitizing and Sterilizing (Optional)

Sterilizing with Hot Water

The hot water temperature should be 185 °F (85 °C). A differential pressure of 21.8 psi (150 kPa, 1.5 bar) must not be exceeded when sterilizing with hot water.

Sterilization time: At least 30 minutes once a temperature of 185 °F (85 °C) is reached at all filter openings. In the interest of energy conservation, the water may be circulated provided the specified temperatures are maintained.

Sterilizing with Steam

The wetted BECODISC stacked disc cartridges can be sterilized with saturated steam up to a maximum temperature of **250 °F (121 °C)** as follows:

Steam quality: The steam must be free of foreign particles and impurities.

Temperature: Max. 250 °F (121 °C) (saturated steam)

Duration: Approx. 20 minutes after steam exits from all filter valves.

Rinsing: After sterilizing with 1.23 gal/ft² (50 l/m²) at 1.25 times the flow rate.

Filter Preparation and Filtration

Unless already completed after sterilization, Eaton recommends pre-rinsing the closed filter with 1.23 gal/ft² (50 l/m²) of water at 1.25 times the flow rate prior to the first filtration. Depending on the application, this usually equals a rinsing time of 10 – 20 minutes. Test the entire filter for leakage at maximum operating pressure.

High-proof alcohol solutions and products that do not allow pre-rinsing with water should be circulated for 10 to 20 minutes. Dispose of the rinsing solution after rinsing.

Safety

When used and handled correctly, there are no known unfavorable effects associated with this product.

Further safety information can be found in the relevant Material Safety Data Sheet, which can be downloaded from our website.

Waste Disposal

Due to their composition, BECODISC stacked disc cartridges can be disposed of as harmless waste. Comply with relevant current regulations, depending on the filtered product.

Storage

BECODISC stacked disc cartridges must be stored in a dry, odor-free, and well ventilated place.

Do not expose the BECODISC stacked disc cartridges to direct sunlight.

BECODISC stacked disc cartridges are intended for immediate use and should be used within 36 months after production date.

Quality Assurance According to DIN EN ISO 9001

The Quality Management System of Eaton Technologies GmbH has been certified according to DIN EN ISO 9001.

This certification verifies that a fully functioning comprehensive Quality Assurance System covering product development, contract controls, choice of suppliers, receiving inspections, production, final inspection, inventory management, and shipment has been implemented.

Extensive quality assurance measures incorporate adherence to technical function criteria and chemical purity and quality recognized as safe under the German legislation governing the production of foods and beverages.

All information is given to the best of our knowledge. However, the validity of the information cannot be guaranteed for every application, working practice and operating condition. Misuse of the product will result in all warranties being voided.

Subject to change in the interest of technical progress.

North America
44 Apple Street
Tinton Falls, NJ 07724
Toll Free: 800 656-3344
(North America only)
Tel: +1 732 212-4700

Greater China
No. 7, Lane 280,
Linhong Road
Changning District, 200335
Shanghai, P.R. China
Tel: +86 21 5200-0099

Europe/Africa/Middle East
Auf der Heide 2
53947 Nettersheim, Germany
Tel: +49 2486 809-0
Friedensstraße 41
68804 Altlußheim, Germany
Tel: +49 6205 2094-0

Asia-Pacific
100G Pasir Panjang Road
#07-08 Interlocal Centre
Singapore 118523
Tel: +65 6825-1668

An den Nahewiesen 24
55450 Langenlonsheim, Germany
Tel: +49 6704 204-0



**For more information, please
email us at filtration@eaton.com
or visit www.eaton.com/filtration**

EN
1 A255.13
09-2021

© 2021 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.