



## Cost-effective filter bags for demanding applications

Eaton's ABP filter bags are suitable for a wide range of applications such as beverage filtration, fine particle removal in parts cleaning, activated carbon removal in process systems, the final filtration of vinegar, lacquers, hydraulic oils and lubricants and many more.

With efficiencies greater than 99%, each ABP filter bag model provides cost-effective filtration solutions for demanding applications. The four models ensure that users can efficiently remove particles ranging from 1 – 25 µm while delivering a long service life.

### Features and benefits

- ABP polypropylene filter bags are fabricated from hydrophobic microfiber filter material, which require pre-wetting with an aqueous solution (full details about wetting and installation are provided with every box of ABP filter bags)
- Highly efficient melt-blown filter material in polypropylene with graded density profiles to maximize dirt-holding capacity and prolong service life
- No additives such as resins, binders or surface treatments
- Spunbond polypropylene cover layer virtually eliminates fiber migration

- Unique UNI-WELD process for bottom seam provides a stronger, more flexible weld seal
- Fully-welded construction with patented SENTINEL® seal ring provides 100% bypass-free filtration
- The pressure-activated SENTINEL seal ring provides a flexible, chemically resistant seal which adapts to any bag filter housing

### Filter specifications

**Material**  
Melt-blown polypropylene

**Cover layer**  
Spunbond polypropylene

**Seal ring**  
Welded polypropylene SENTINEL seal ring

**Retention ratings<sup>1</sup>**  
1, 5, 10, 25 µm  
@ > 99% efficiency

### Dimensions/Parameters

**Sizes**  
03: Ø 100 x 230 mm L  
04: Ø 100 x 380 mm L

**Filter area**  
03: 0.08 m<sup>2</sup>  
04: 0.16 m<sup>2</sup>

**Max. operating temperature**  
Polypropylene: 90 °C

**Max. differential pressure**  
2.5 bar

**Recommended change-out pressure for disposal<sup>2</sup>**  
0.8 – 1.5 bar

**Max. flow rates<sup>3</sup>**  
03: 3 m<sup>3</sup>/h  
04: 5 m<sup>3</sup>/h

### FDA/EC conformity


All polypropylene materials used in manufacturing comply with the regulations of the Food and Drug Administration (FDA), title 21 of the Code of Federal Regulations Section 177, and EC Regulations 1935/2004 and 10/2011, as applicable for food and beverage contact.



Powering Business Worldwide

# ABP Filter Bag Range

## Flow rates

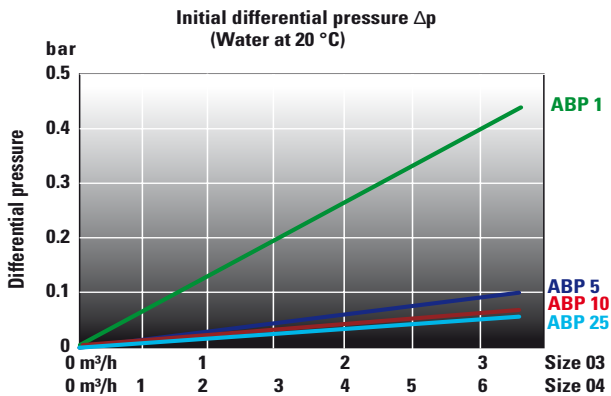

## Filter removal efficiency


Retention ratings <sup>1</sup> ( $\mu\text{m}$ )	Particle size ( $\mu\text{m}$ ) at common removal efficiencies (%)				Max. operating temperature (°C)
	> 60%	> 90%	> 95%	> 99%	
1	-	1	2	4	90
5	1	2	4	5	90
10	2	5	10	30	90
25	10	30	40	-	90

<sup>1</sup> Reference values based on single pass tests in ambient lab conditions with ISO test dust in water at 10 m³/h/size 02.

<sup>2</sup> Dependent on the respective applications and their requirements.

<sup>3</sup> For liquids with a dynamic viscosity of 1 mPa·s @ 20 °C.

## Ordering Information

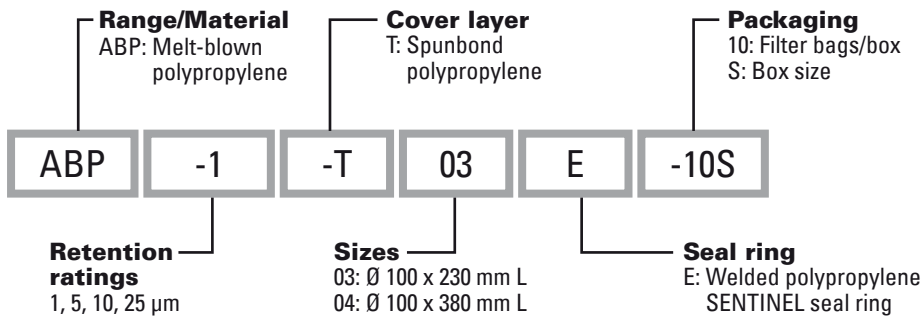

**North America**  
44 Apple Street  
Tinton Falls, NJ 07724  
Toll Free: 800 656-3344  
(North America only)  
Tel: +1 732 212-4700

**Europe/Africa/Middle East**  
Auf der Heide 2  
53947 Nettersheim, Germany  
Tel: +49 2486 809-0  
Friedensstraße 41  
68804 Altluisheim, Germany  
Tel: +49 6205 2094-0

An den Nahewiesen 24  
55450 Langenlonsheim, Germany  
Tel: +49 6704 204-0

**China**  
No. 3, Lane 280,  
Linhong Road  
Changning District, 200335  
Shanghai, P.R. China  
Tel: +86 21 5200-0099

**Singapore**  
100G Pasir Panjang Road #07-08  
Singapore 118523  
Tel: +65 6825-1668

**For more information, please email us at [filtration@eaton.com](mailto:filtration@eaton.com) or visit [www.eaton.com/filtration](http://www.eaton.com/filtration)**

© 2021 Eaton. All rights reserved. All trademarks and registered trademarks are the property of their respective owners. All information and recommendations appearing in this brochure concerning the use of products described herein are based on tests believed to be reliable. However, it is the user's responsibility to determine the suitability for his own use of such products. Since the actual use by others is beyond our control, no guarantee, expressed or implied, is made by Eaton as to the effects of such use or the results to be obtained. Eaton assumes no liability arising out of the use by others of such products. Nor is the information herein to be construed as absolutely complete, since additional information may be necessary or desirable when particular or exceptional conditions or circumstances exist or because of applicable laws or government regulations.

EN  
EF-FTB-17  
01-2021