




Magnetic Level Switches for Liquids



measuring
•
monitoring
•
analysing



MS

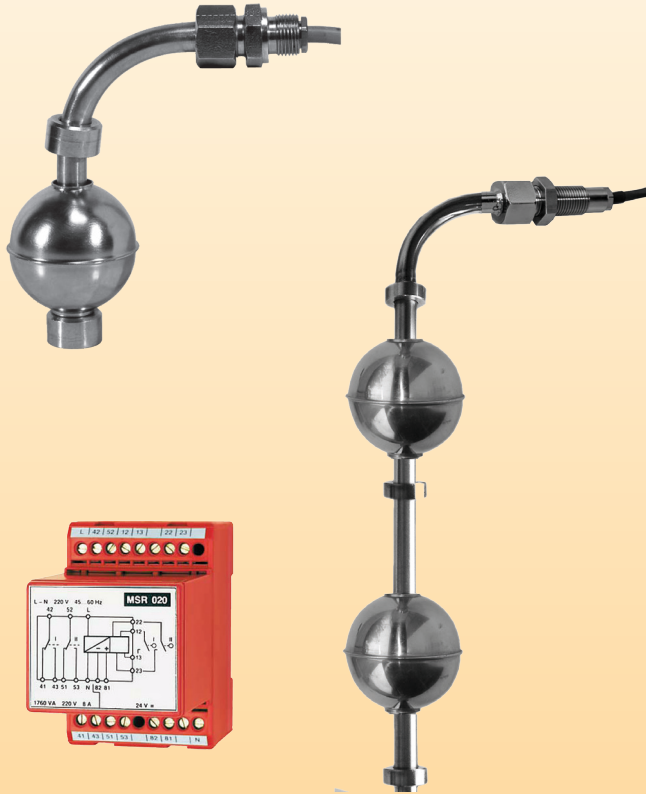

- Switch points: max. 3
- p_{max} : 100 bar; t_{max} : 150 °C
- Connection:
G $\frac{3}{8}$, G1 $\frac{1}{2}$, G2, 1 $\frac{1}{2}$ " NPT,
2" NPT male, DIN and
ANSI flanges, special
connections
- Material:
Stainless steel, brass,
PVC-U, PP
- ATEX Certification
- Connection heads:
Aluminium, ABS




KOBOLD companies worldwide:

ARGENTINA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLUMBIA, CZECHIA, DOMINICAN REPUBLIC, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, ROMANIA, SINGAPORE, SOUTH KOREA, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com

Design

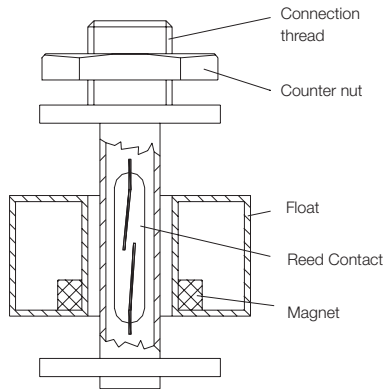

Description

Magnetic level switches are used for the monitoring and control of liquid levels in vessels. Magnetic level switches are manufactured to customer specification.

An overview of types available with minimum lengths of measuring tube is set out on the following pages. Please refer to this overview when placing your order. Furthermore any limits can be specified within the limits found in the brochure.

For example:

- Longer measuring tube
- Longer connection cable
- Different cable materials
- Several contacts and different contact operations
- Different materials
- Wide range connections and electrical terminal boxes

Method of Operation

- Kobold magnetic float switches are fitted with a hermetically sealed contact which is situated in the tube.


The float sliding on the tube contains a ring magnet whose magnetic field switches the sealed contact in a noncontacting fashion. The sealed contacts are available as N/O, N/C or changeover contacts.

The float sliding up and down on the liquid is the only moving part in the Kobold magnetic float switches.

Advantages

- Simple installation
- Long electrical service life due to sealed contacts
- High-degree of operational reliability with air gap between measuring tube and floats
- Several levels can be monitored with one float
- Open/close function or changeover contact available

Model Codes

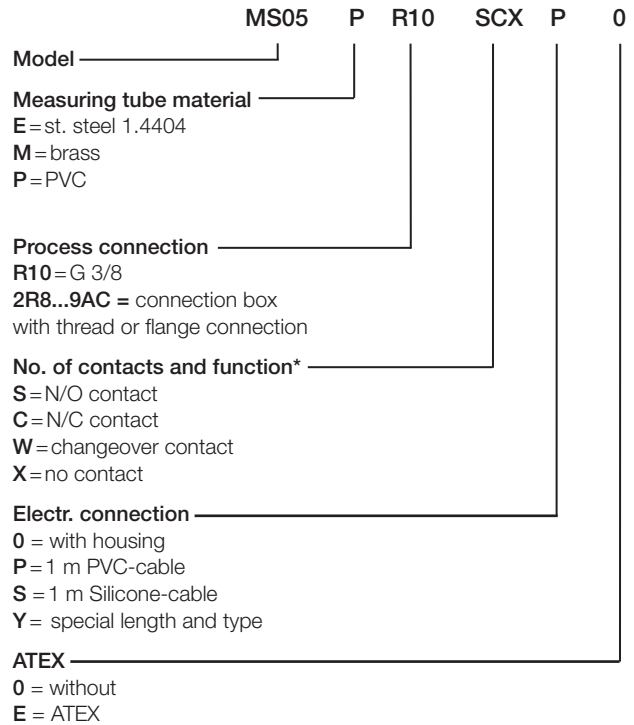

Non-standard versions on request

***Please note:**

Contact state referred to empty tank.

Simply link letters for several contacts.

The first letter represents the topmost contact, the second letter the second contact from the top, and so on. The position of the contacts, measured from the sealing edge of the connection screwing, must also be specified.

L1 = highest contact (mm) from the top (sealing edge)

L2 = second contact (mm) from the top (sealing edge)

and so forth



Float designs

Model	Form	Materials	Float outside-Ø [mm]	Height [mm]	Bore Hole Ø [mm]	Min. Liquid Density [kg/dm ³]	Max. temperature	Nominal pressure at 20 °C
MS05	Cylinder hollow	PP	42	40	14	>0,6	80 °C	3 bar
MS06 ¹⁾	Cylinder solid material	PP	40	20	14	>0,9	90 °C	100 bar
MS07	Cylinder hollow	PVC-U	42	40	14	>0,9	55 °C	3 bar
MS10	Ball hollow	Stainless steel 1.4404	52	52	15	>0,6	150 °C	30 bar

¹⁾ For MS06 model, one float is required for each switch point.
For all other floats two contacts can be operated with one float.

ATEX Certificate:



II 1 GD Ex ia IIC T6 Ga / Ex ia IIIC T85°C Da

-20 ≤ Ta ≤ +60 °C

Connection cable

PVC: max. 70 °C (standard)

Silicone: max. 150 °C

Please note max.-values of every single model

Technical Details

Hysteresis: 5 mm
difference in level

Damping tube for agitated liquids

Float switches with damping tube for agitated or dirty liquids can be supplied upon request.

Float switches with integrated temperature switch, fixed switch point between 60 °C and 150 °C upon request.

Option: Pt 100 available

Supplementary devices:

1. Contact protection relays


We recommend the use of contact protection relays in conjunction with sealed contacts.

Contact protection relays have the following advantages:

- No contact overloads arising from sparking and high currents, which can, for example, be caused by self-induced e.m.f.'s when switching solenoid valves.
- Float switches are electrically isolated from the high voltage power supply system.
- Protection for persons who come into contact with liquids according to VDE 0100.
- Standard models:
 - Model MSR 10, 1 channel
 - Model MSR 20, 2 channels
 - Model MSR 11, 1 changeover bistable
- ATEX-models:
 - Model KFD2-SR2-Ex1.W 1 channel, 1 relay output, supply 24 V_{DC}
 - Model KFA6-SR2-Ex1.W 1 channel, 1 relay output, supply 230 V_{AC}
 - Model KFD2-SR2-Ex2.W, 2 channels, 2 relays output, supply 24 V_{DC}
 - Model KFA6-SR2-Ex2.W, 2 channels, 2 relays output, supply 230 V_{AC}

Temperature monitoring

**Cylindrical float
made of polypropylene**
Dimensions [mm]

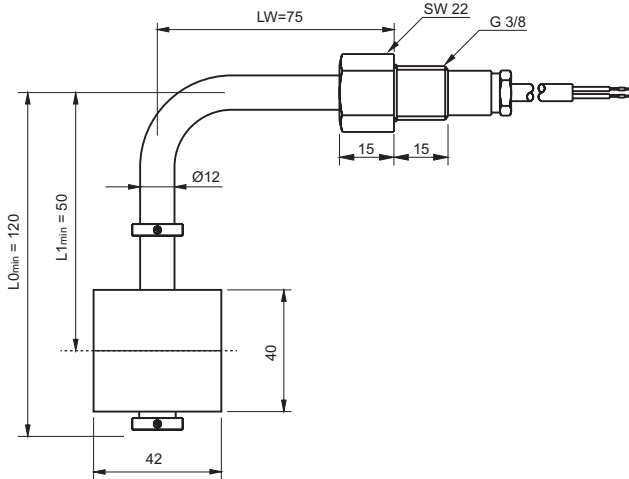

Technical Data

N/O contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
N/C contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
Changeover contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V

* Note: contact state referred to empty tank and switch point distance refer to a density 1.0 kg/dm³


Cable length:	1 m
Installation position:	lateral ±30°
Protection type:	IP 65
min. liquid density:	>0.6 kg/dm ³
max. pressure (at 20°C):	3 bar
max. temp. PVC cable:	70°C
max. temp. silicone cable:	80°C
max. length of guide tube:	4 m
Connection heads:	see following pages
Switch point min. distance from end of meas. tube:	45 mm (for special length)
Switch point min. distance between contacts:	between L1 and L2: 45 ±3 mm between L2 and L3: 54 ±3 mm
Hysteresis:	5 mm

Model	Guide tube ¹⁾	Process connection	Contact L1	Contact L2	Contact L3	Electr. connection	ATEX
MS05- (PP float)	M = brass E = 1.4404	R10 = G¾ XXX = see following pages for different connection heads	S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	0 = with housing P = 1 m PVC-cable S = 1 m silicone cable Y ²⁾ = special length and type	0 = without E = ATEX

¹⁾Please specify in writing total and contact lengths.

²⁾Please specify in writing length and type of cable.

High-pressure applications
Dimensions [mm]

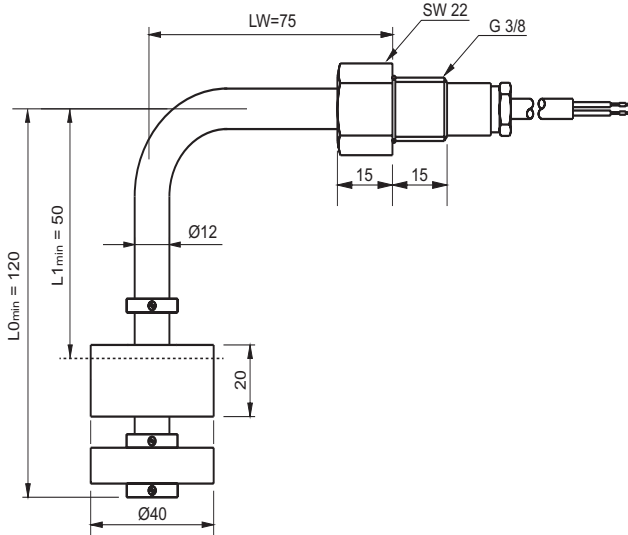

Technical Data

N/O contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
N/C contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
Changeover contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V

* Note: contact state referred to empty tank and switch point distance refer to a density 1.0 kg/dm³

Cable length:	1 m
Installation position:	lateral ±30°
Protection type:	IP 65
min. liquid density:	>0.9 kg/dm ³
max. pressure (at 20°C):	100 bar
max. temp. PVC cable:	70°C
max. temp. silicone cable:	90°C
max. length of guide tube:	4 m
Connection heads:	see following pages
Switch point min. distance from end of guide tube:	50 mm (for special length)
Switch point min. distance between contacts:	between L1 and L2: 70 ±7 mm between L2 and L3: 70 ±7 mm
Hysteresis:	5 mm


Model	Guide tube ¹⁾	Process connection	Contact L1	Contact L2	Contact L3	Electr. connection	ATEX
MS06- (PP float)	M = brass E = 1.4404	R10 = G $\frac{3}{8}$ XXX = see following pages for different connection heads	S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	0 = with housing P = 1 m PVC-cable S = 1 m silicone cable Y ²⁾ = special length and type	0 = without E = ATEX

¹⁾Please specify in writing total and contact lengths.

²⁾Please specify in writing length and type of cable.

Cylindrical float and tube made of PVC

Dimensions [mm]

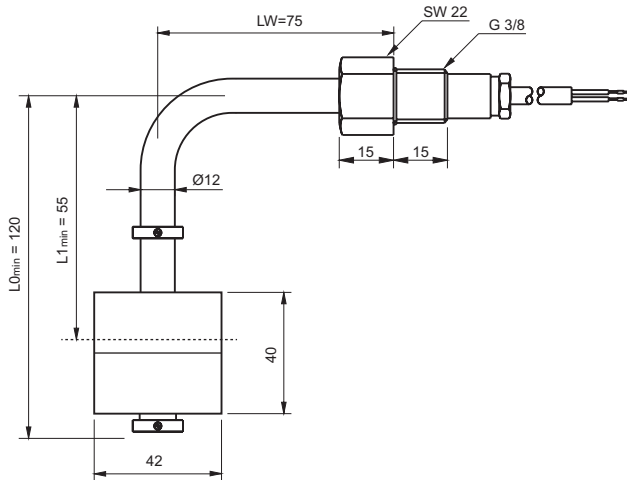

Technical Data

N/O contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
N/C contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V
Changeover contact*:	230 V _{AC/DC} / 1 A / 60 VA ATEX-version: Ui: 40 V

* Note: contact state referred to empty tank and switch point distance refer to a density 1.0 kg/dm³


Cable length:	1 m
Installation position:	lateral ±30°
Protection type:	IP 65
min. liquid density:	>0.9 kg/dm ³
max. pressure (at 20°C):	3 bar
max. temp. PVC cable:	55°C
max. temp. silicone cable:	55°C
max. length of guide tube:	2 m
Connection heads:	see following pages
Switch point min. distance from end of guide tube:	45 mm (for special length)
Switch point min. distance between contacts:	between L1 and L2: 45 ±3 mm between L2 and L3: 54 ±3 mm
Hysteresis:	5 mm

Model	Guide tube ¹⁾	Process connection	Contact L1	Contact L2	Contact L3	Electr. connection	ATEX
MS07- (PVC float)	P = PVC	R10 = G $\frac{3}{8}$ XXX = see following pages for different connection heads	S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	0 = with housing P = 1 m PVC-cable S = 1 m silicone cable Y ²⁾ = special length and type	0 = without E = ATEX

¹⁾ Please specify in writing total and contact lengths.

²⁾ Please specify in writing length and type of cable.

Ball float made of stainless steel 1.4404
Dimensions [mm]

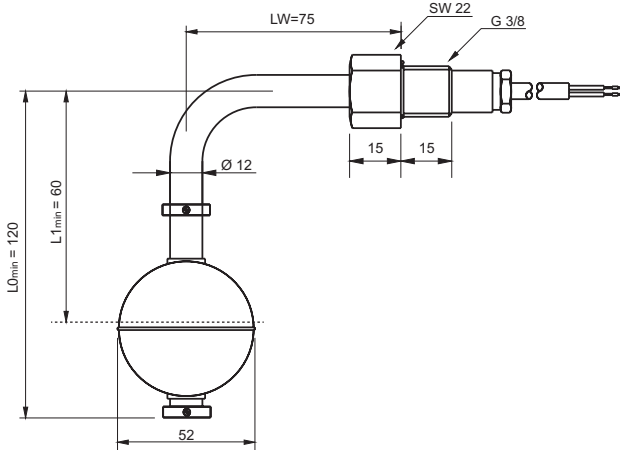

Technical Data

N/O contact*: 230 V_{AC/DC} / 1 A / 60 VA
ATEX-version: Ui: 40 V

N/C contact*: 230 V_{AC/DC} / 1 A / 60 VA
ATEX-version: Ui: 40 V

Changeover contact*: 230 V_{AC/DC} / 1 A / 60 VA
ATEX-version: Ui: 40 V

* Note: contact state referred to empty tank and switch point distance refer to a density 1.0 kg/dm³

Cable length: 1 m
Installation position: lateral ±30°
Protection type: IP 65
min. liquid density >0.6 kg/dm³
max. pressure (at 20°C): 30 bar
max. temp. PVC cable: 70°C
max. temp. silicone cable: 150°C
max. length of guide tube: 4 m
Connection heads: see followings pages
Switch point min. distance from end of guide tube: 45 mm (for special length)
Switch point min. distance between contacts: between L1 and L2: 45 ±3 mm
between L2 and L3: 66 ±3 mm
Hysteresis: 5 mm


Model	Guide tube ¹⁾	Process connection	Contact L1	Contact L2	Contact L3	Electr. connection	ATEX
MS10- (1.4404 float)	M = brass E = 1.4404	R10 = G% XXX = see following pages for different connection heads	S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	X = w/o S = N/O C = N/C W = SPDT	0 = with housing P = 1 m PVC-cable S = 1 m silicone cable Y²⁾ = special length and type	0 = without E = ATEX

¹⁾ Please specify in writing total and contact lengths.

²⁾ Please specify in writing length and type of cable.

Model 2/4

Aluminium housing
Dimensions and materials

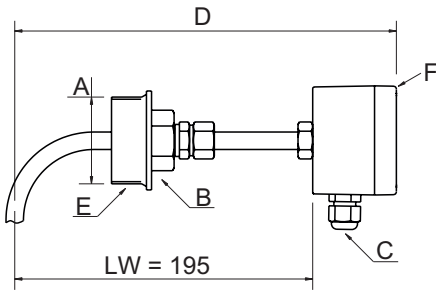


Model	Process connection (A)*	Width across flats (B)	Electrical connection (C)	Overall width (D)	Sliding screwed fitting (E)	Housing (F)	t _{max}
2...	...R8 = G 1½	30AF	M16 x 1,5	253 mm	Brass	Al	90°C
	...R9 = G 2	36AF					
	...N8 = 1½" NPT	30AF					
	...N9 = 2" NPT	36AF					
4...	...R8 = G 1½	30AF	M16 x 1,5	253 mm	1.4404	Al	90°C
	...R9 = G 2	36AF					
	...N8 = 1½" NPT	30AF					
	...N9 = 2" NPT	36AF					

* Size of process connection must be according with float size
* Take care about the existing connection dimensions

Model 5

ABS Housing
Dimensions and materials

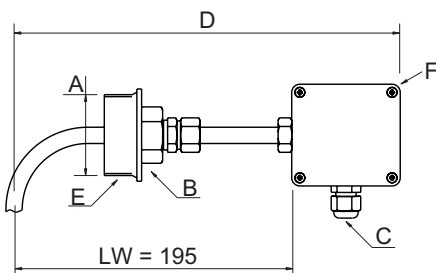


Model	Process connection (A)*	Width across flats (B)	Electrical connection (C)	Overall width (D)	Sliding screwed fitting (E)	Housing (F)	t _{max}
5...	...R8 = G 1½	30AF	M16 x 1,5	278 mm	PVC	ABS	55°C
	...R9 = G 2	36AF					
	...N8 = 1½" NPT	30AF					
	...N9 = 2" NPT	36AF					

* Size of process connection must be according with float size
* Take care about the existing connection dimensions

Model 9

Flange according to DIN EN 1092-1 PN16 / ANSI B 16.5 150 lbs RF
Dimensions and materials

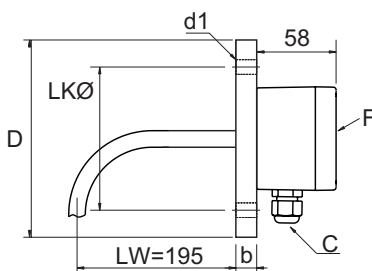

Model	Flange size 1.4404	D	b	LKØ	d1	Electrical connection (C)	Housing (F)	t _{max}
9...	...F8 =DN40	150	16	110	4 x Ø18	M16 x 1,5	Al	90°C
	...F9 =DN50	165	18	125	4 x Ø18			
	...F0 =DN65	185	18	145	4 x Ø18			
	...FB =DN80	200	20	160	4 x Ø18			
	...FC =DN100	220	20	180	8 x Ø18			
	...FD =DN125	250	22	210	8 x Ø18			
	...A8 =1½"	127	17,5	98,6	4 x Ø15,7			
	...A9 =2"	152,4	19,1	120,7	4 x Ø19,1			
	...A0 =2½"	177,8	22,4	139,7	4 x Ø19,1			
	...AB =3"	190,5	23,9	152,4	4 x Ø19,1			
	...AV =3½"	215,0	23,9	177,8	8 x Ø19,1			
...AC =4"	228,6	23,9	190,5	8 x Ø19,1				

* Size of process connection must be according with float size
* Take care about the existing connection dimensions



Technical Data

Model MSR

Power supply:	230 V _{AC} -10/+6% 50 - 60 Hz
Power consumption:	max. 6 VA
Relay output:	MSR-010 (1 floating changeover contact) MSR-020 (2 floating changeover contact) MSR-011 (1 floating changeover contact bistable) max. 250 V _{AC} , 8 A
Details:	see datasheet

Model KFA6-SR2-Ex2.W (Double channel)

ATEX-approval:	⊕ II (1) G [Ex ia] IIC, II (1)D [Ex ia] IIIC
Ex / I.S. data, ATEX:	
U _o :	10.6 V
I _o :	19.1 mA
P _o :	51 mW
U _m :	253 V _{AC}
Power supply:	207...253 V _{AC} , 45...65 Hz
Power consumption:	max. 1 W
Relay Output:	max. 253 V _{AC} , 2 A
Details:	see datasheet

Model KFD2-SR2-Ex2.W (Double channel)

ATEX-approval:	⊕ II(1) G [Ex ia] IIC , II (1) D [Ex ia] IIIC
Ex / I.S. data, ATEX:	
U _o :	10.5 V
I _o :	13 mA
P _o :	34 mW
U _m :	253 V _{AC}
Power supply:	20...30 V _{DC} , 45...65 Hz
Power consumption:	max. 0.9 W
Relay Output:	max. 253 V _{AC} , 2 A
Details:	see datasheet

Model KFA6-SR2-Ex1.W (Single channel)


ATEX-approval:	⊕ II(1) G [Ex ia] IIC , II (1) D [Ex ia] IIIC
Ex / I.S. data, ATEX:	
U _o :	10.6 V
I _o :	19.1 mA
P _o :	51 mW
U _m :	253 V _{AC}
Power supply:	207...253 V _{AC} , 45...65 Hz
Power consumption:	max. 1 W
Relay Output:	max. 253 V _{AC} , 2A
Details:	see datasheet

Model KFD2-SR2-Ex1.W (Single channel)


ATEX-approval:	⊕ II(1) G [Ex ia] IIC , II (1) D [Ex ia] IIIC
Ex / I.S. data, ATEX:	
U _o :	10.5 V
I _o :	13 mA
P _o :	34 mW
U _m :	253 V _{AC}
Power supply:	20...30 V _{DC} , 45...65 Hz
Power consumption:	max. 0.9 W
Relay Output:	max. 253 V _{AC} 2A
Details:	see datasheet

Standard models


MSR010

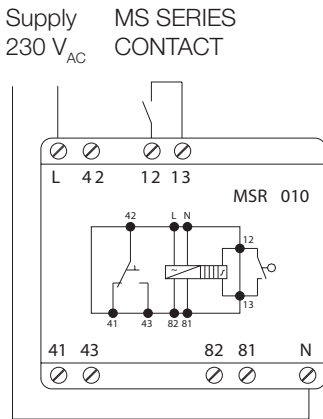

MSR011

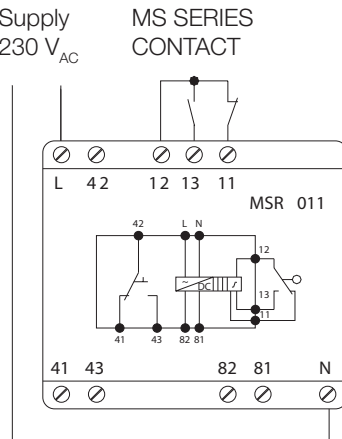

MSR020

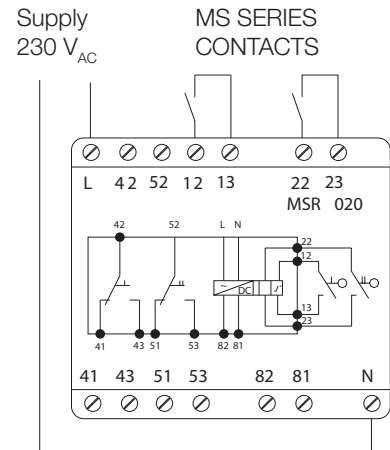


ATEX-models

KFD2-SR2-Ex2.W (Double channel)
KFA6-SR2-Ex2.W (Double channel)

KFD2-SR2-Ex1.W (Single channel)
KFA6-SR2-Ex1.W (Single channel)

Hazardous Zone

Safe Zone

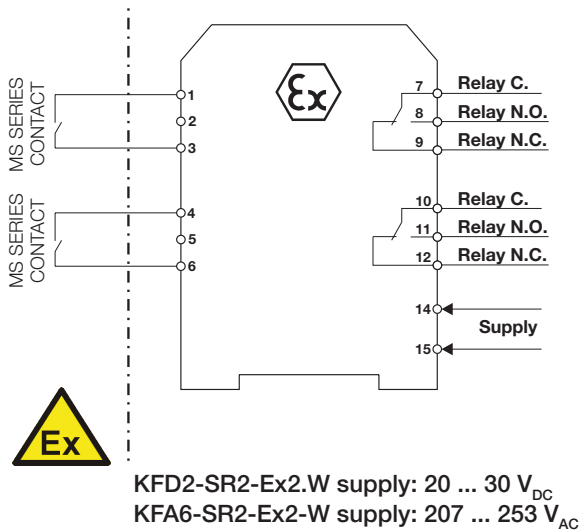

Hazardous Zone

Safe Zone

