



Turbine Wheel Flow Meter

plastic version for liquids



measuring
•
monitoring
•
analysing

TUR



Model: TUR
with transmitter



Model: TUR with
pointer indication

- Measuring ranges:
0.2-5.0...2.5-100,0 m³/h water
- Measuring accuracy: ± 1% of full scale
- p_{max}: 10 bar; t_{max}: 70 °C
- Viscosity range: low viscosity
- Connection:
flange DN 25 ... DN 100
- Material: PVC, PVDF
- Output: pulses,
0-20 mA, 4-20 mA or 0-10 V,
LED display, pointer indication,
switching output



Model: TUR with
ADI electronics



Model: TUR with
compact electronics



S4

KOBOLD companies worldwide:

ARGENTINA, AUSTRALIA, AUSTRIA, BELGIUM, BULGARIA, CANADA, CHILE, CHINA, COLOMBIA, CZECHIA, EGYPT, FRANCE, GERMANY, GREAT BRITAIN, HUNGARY, INDIA, INDONESIA, ITALY, MALAYSIA, MEXICO, NETHERLANDS, PERU, POLAND, REPUBLIC OF KOREA, ROMANIA, SINGAPORE, SPAIN, SWITZERLAND, TAIWAN, THAILAND, TUNISIA, TURKEY, USA, VIETNAM

KOBOLD Messring GmbH
Nordring 22-24
D-65719 Hofheim/Ts.
Head Office:
+49(0)6192 299-0
+49(0)6192 23398
info.de@kobold.com
www.kobold.com

Service

The KOBOLD flow meters with turbine wheel serve to measure, control and regulate flowing liquids. The use of chemically highly resistant materials allows the devices to be used with acids, lyes and aggressive media that are to be found in the chemical industry.

Design

A flow measurement system comprises:

1 Fitting

Material: PVC or PVDF
 Connection: flange NW 25, 50, 80 or 100

2a Pulse generator

PNP (24 V_{DC}, I_{max} 400 mA)
 NPN (24 V_{DC}, I_{max} 400 mA)

2b Transmitter (option)

Output: 0 - 20 mA, 4 - 20 mA or 0 - 10 V
 Supply: 24 V_{DC}, 24 V_{AC} or 230 V_{AC}


Method of Operation

The unit comprises a thick-walled plastic pipe (1); rotatable PVC flanges are secured at each end.

Bearing cross bars (2), that ensure steady flow, are fitted in inlet and outlet. A turbine wheel (3) with cast-in mild steel pieces at each end rotates smoothly depending on the flow rate. The metal parts do not come into contact with the medium and are therefore protected against corrosion. The sapphire bearing bushes (4a) are fitted in the bearing cross bars and are adjustable.

The bearing axle made of chemically highly resistant tungsten-carbide is cast into the turbine wheel. The rotation is picked off by a top-mounted pulse generator (5) without seals and mechanically non-interacting, and transferred to the evaluating electronics as impulses.

The evaluating electronics converts the pulse signal into a display, limit contacts, analogue output, or counts the quantity of liquid flow.

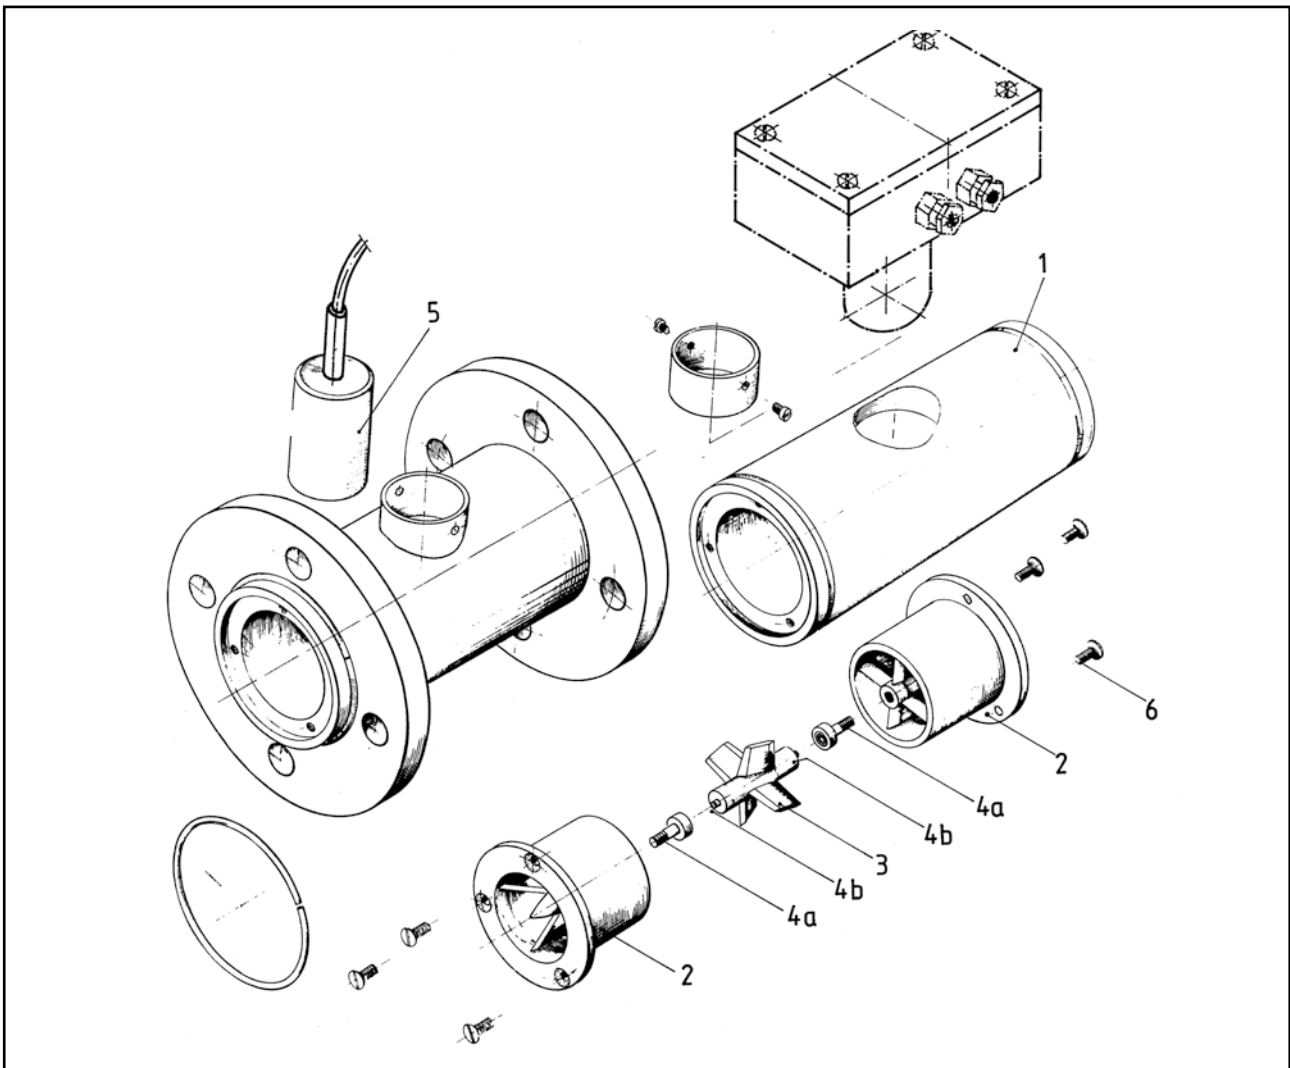



Technical Details


Measuring accuracy: $\pm 1\%$ of full scale
 Viscosity range: for low-viscosity media
 Max. operating temperature: 60 °C (PVC version)
 70 °C (PVDF version)
 Max. operating pressure: PN 10
 Protection type: IP 65

Materials


	PVC version	PVDF version
(1) Fitting	PVC	PVDF
(2) Bearing cross bars	PVC	PVDF
(3) Turbine wheel	PVC	PVDF
(4a) Bearing bush	sapphire	sapphire
(4b) Bearing axle	sapphire	sapphire
(6) Bolts	polyamide	PVDF
(7) Flange	PVC	PVC

Electrical Connection Diagram


Connection diagram NPN TUR-1...N

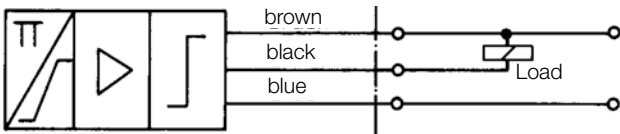


Connection diagram PNP TUR-1...P

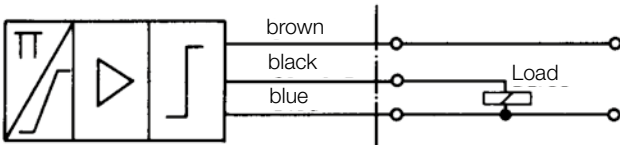


Connection diagram Transmitter TUR-2...M...

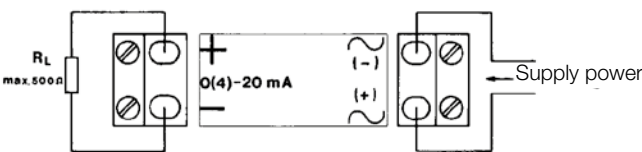

TUR-2...C...

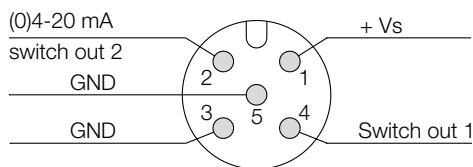

TUR-2...Z...



Electronics

● **Frequency output**

Power supply: 24 V_{DC} $\pm 20\%$
 Idle current: typ. 15 mA
 Pulse output: PNP or NPN, max. 400 mA
 Electrical connection: 2 m PVC cable

● **Transmitter**

Power supply: 230 V_{AC}, 24 V_{AC}, 24 V_{DC}
 Output: 0-20 mA, 4-20 mA or 0-10 V_{DC}
 4-wire
 Max. load: 500 Ω
 Electrical connection: adapter box with cable connection

● **Compact electronics**

Display: 3-segment LED
 Analogue output: (0)4... 20 mA adjustable, max. 500 W
 Switching outputs: 1 (2) semiconductor PNP or NPN factory set
 Contact operation: N/C / N/O contact programmable with 2 buttons
 Setting:
 Power supply: 24 V_{DC} $\pm 20\%$, 3-wire technology, approx. 100 mA
 Electrical connection: plug connector M12x1

Pointer indicator with analogue output

Housing: aluminium
 Display: moving-coil instrument, 240° display
 Power supply: 24 V_{DC} $\pm 20\%$
 Output: 0-20 mA or 4-20 mA, 3-wire
 Max. load: 250 Ω
 Electrical connections: plug connector M12x1

● **ADI electronics**

Display: bar graph and 5-digit digital display
 Analogue output: (0)4...20 mA, 0-10 V_{DC}
 2 switching outputs: relay /changeover contact, max. 250 V_{AC}/5 A resistive load, max. 30 V_{DC} / 5 A
 Setting:
 Power supply: 100 ... 240 V_{AC} $\pm 10\%$ or 18 ... 30 V_{AC} / 10 ... 40 V_{DC}
 Electrical connection: pluggable terminal block via cable gland

For more technical details on ADI electronic indicator see data sheet ADI-1.

TUR-1...
with Frequency Output



TUR-2...
with Integrated Converter



Measuring sensor with frequency output – Order Details (example: TUR-1025 N)

Connection PVC flange Nominal dia.	Measuring range water [m³/h]	Frequency range [Hz]	Frequency [Pulses/Liter]	Model designation wetted parts		Pulse detector
				PVC	PVDF	
25	0.2-5.0	5.5-157	113	TUR-1025...	TUR-1125...	..N pulse detector NPN, 24 V _{DC} , 3-wire
50	1.2-20.0	4.8-79.4	14.30	TUR-1050...	TUR-1150...	
80	2.0-80.0	2.7-106.4	4.79	TUR-1080...	TUR-1180...	..P pulse detector PNP, 24 V _{DC} , 3-wire
100	2.5-100.0	2.1-82.2	2.96	TUR-1010...	TUR-1110...	


Measuring sensor with ADI electronics – Order Details (example: TUR-2025 M000)

Connection PVC flange Nominal dia.	Measuring range water [m³/h]	Model designation wetted parts		Evaluating electronics Transmitter									
		PVC	PVDF	Supply	Output								
25	0.2-5.0	TUR-2025...	TUR-2125...	..M0.. = 230 V _{AC} ..M2.. = 24 V _{AC} ..M3.. = 24 V _{DC}	..40 = 4-20 mA ..00 = 0-20 mA ..10 = 0-10 V _{DC}								
50	1.2-20.0	TUR-2050...	TUR-2150...	Compact electronics* ..C30R = LED display, 2x open collector, PNP, plug con. M12x1 ..C30M = LED display, 2x open collector, NPN, plug con. M12x1 ..C34P = LED display, 4-20 mA, 1x open collector, PNP, plug connector M12x1 ..C34N = LED display, 4-20 mA, 1x open collector NPN, plug connector M12x1 Pointer indication* ..Z300 = 240° pointer indication, 0-20 mA, plug con. M12x1 ..Z340 = 240° pointer indication, 4-20 mA, plug con. M12x1 ADI electronics* <table border="1" style="width:100%; border-collapse: collapse;"> <thead> <tr> <th>Display</th> <th>Supply</th> <th>Output</th> <th>Contacts</th> </tr> </thead> <tbody> <tr> <td>..K.. = Bar graph/ Digital display</td> <td>0 = 100-240 V_{AC/DC} 3 = 18-30 V_{AC}, 10-40 V_{DC}</td> <td>0 = without 4 = 0(4)-20 mA, 0-10 V</td> <td>2 = 2 change- over contacts</td> </tr> </tbody> </table>		Display	Supply	Output	Contacts	..K.. = Bar graph/ Digital display	0 = 100-240 V _{AC/DC} 3 = 18-30 V _{AC} , 10-40 V _{DC}	0 = without 4 = 0(4)-20 mA, 0-10 V	2 = 2 change- over contacts
Display	Supply	Output	Contacts										
..K.. = Bar graph/ Digital display	0 = 100-240 V _{AC/DC} 3 = 18-30 V _{AC} , 10-40 V _{DC}	0 = without 4 = 0(4)-20 mA, 0-10 V	2 = 2 change- over contacts										
80	2.0-80.0	TUR-2080...	TUR-2180...										
100	2.5-100.0	TUR-2010...	TUR-2110...										


* Please specify flow direction in writing

Installation Instructions


- Choice of installation position.
- Flow rate in direction of arrow.
- The unit must always be flooded with liquid (see Installation Example).
- The installation must be free of stress and with compressible seal.
- Gaskets are not supplied.

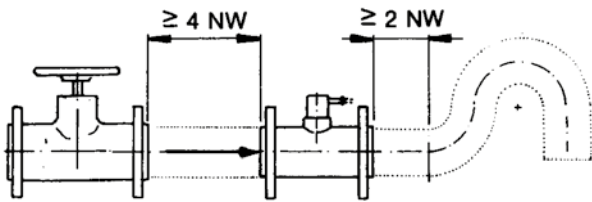

Pressure Loss Diagram

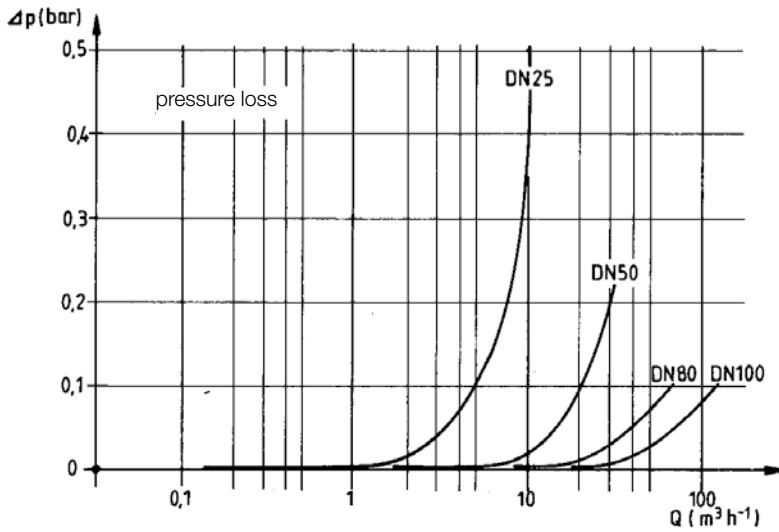

Dimensions

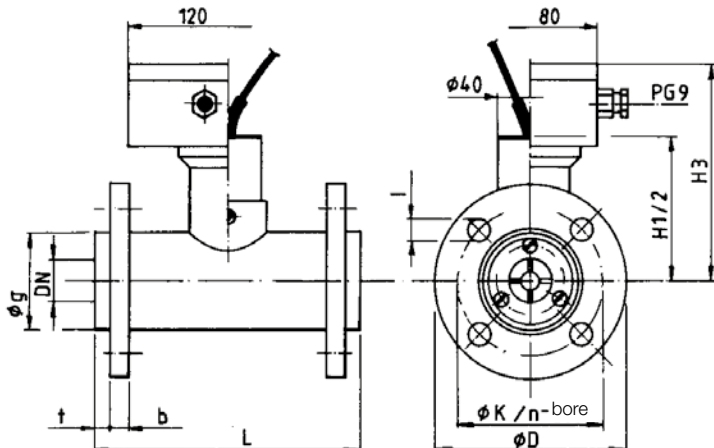


DN	b	D	g	H2*	H3	K	L	n	l	t
25	15	115	58	87	127	85	160	4x	14	9
50	20	165	88	100	140	125	200	4x	18	11
80	22	200	123	115	155	160	225	8x	18	11
100	22	220	145	125	165	180	250	8x	18	11

* with NPN- or PNP sen

Dimensions


TUR with pointer

Description	Dimension A
TUR-..25	128
TUR-..50	141
TUR-..80	156
TUR-..10	166

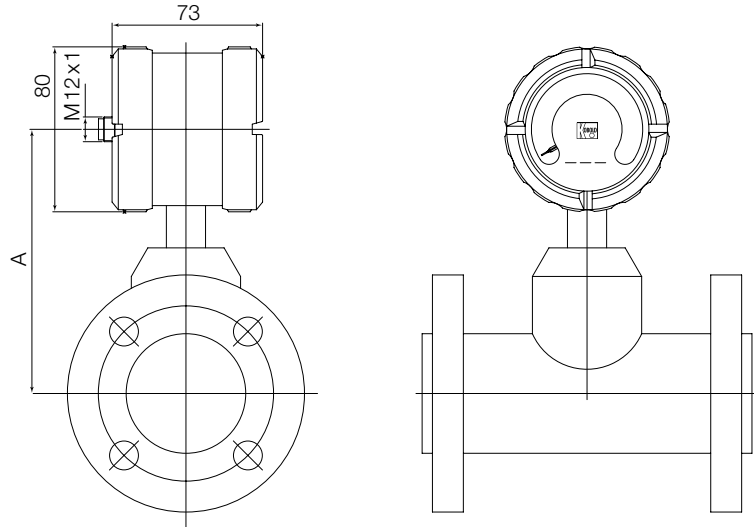

TUR with compact

Description	Dimension A
TUR-..25	112
TUR-..50	125
TUR-..80	140
TUR-..10	150

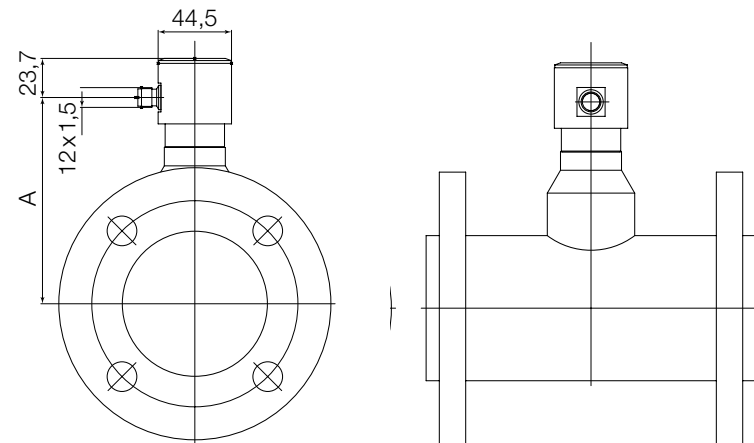

TUR with ADI

Description	Dimension A
TUR-..25	77
TUR-..50	90
TUR-..80	105
TUR-..10	115

